

ASSEMBLY AND INSTALLATION INSTRUCTIONS FOR HUSTLER MODEL C-32 ANTENNA BASE

1. Select the desired location on the car for mounting the antenna.
2. Drill a 1 to 1-1/16" inch dia. center hole and three 7/32 dia. holes. Use the ground plate as a template to mark the exact position of the holes.
3. Assemble the two halves of the split ball to each other and to the insulator disc as shown. Do not tighten nut A at this time.
4. Scrape away paint and insulating material from the underside of the car body, particularly at one of the 7/32 dia. holes where the grounding lockwasher will be placed.
5. Assemble the ball and insulator to the car body as shown. Note that a lockwasher is placed between the car body and the ground plate to get good grounding action to the car body.
6. Rotate the ball assembly on the insulator, swivel the upper half ball on the lower half ball until the desired vertical position of the spring (and subsequently the mast) is obtained.

7. Tighten nut A and cap screw.
8. Attach lead cable to base as shown. Run the lead cable thru the forward portion of the trunk as low as possible and then under the floor mat to the front of the car along the kickplate and up behind the dash to the receiver.

Newtronics Limited Warranty

Newtronics Antenna Corp. warrants its products to be free of defects in material and workmanship and extends this warranty under intended use and normal service conditions to the original owner for a period of one year from the date of purchase.


This warranty does not apply to any product that has been repaired or altered in any manner and is void for any damage due to accident, neglect, unreasonable use, improper installation of any other cause not arising out of defects in material of workmanship.

The obligations of Newtronics Antenna Corp. are limited to repairing or replacing, at its option, any product or part that is returned to the factory all transportation charges prepaid, accompanied by proof of purchase and which examination reveals to have been defective within the warranty period stated above. Newtronics Antenna Corp. does not assume nor is any person authorized to assume for it, any obligations other than that herein stated.

Any implied warranties, including but not limited to fitness for a particular purpose, are limited in duration for the above one year period.

Newtronics Antenna Corp. shall not be liable under this warranty, or any implied warranty, for loss of use of the product or for other consequential loss or damage incurred by the purchaser.

Some states do not allow the exclusion of limitation of implied warranties of consequential damages and so the above exclusions of limitations may not apply. This warranty gives you special legal rights and you may have other rights that vary from state to state.

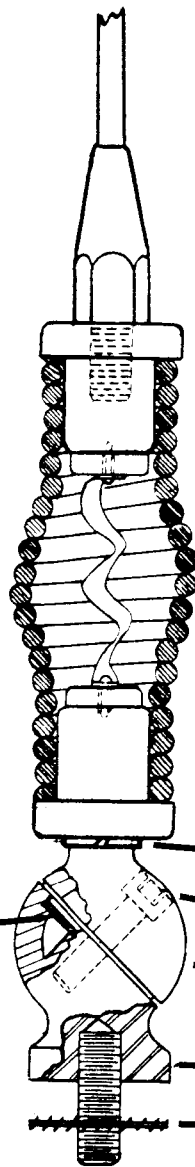

- LOCKWASHER 2381-9
- LOCKWASHER SUPPLIED IN THE SPRING PACKAGE ONLY
- SCREW 2194-22 (3)
- CAP SCREW 1940
- RUBBER GASKET 1945
- SWIVEL BALL 1844
- GROUND PLATE 1944
- BALL BASE & STUD 3014
- WASHER 2233-9
- LOCKWASHER 2381-9
- MOUNTING INSULATOR 3002
- CAR BODY
- GROUNDING LOCKWASHER 2381-5
- SPLIT LOCKWASHER 2491-12
- LOCKWASHER 2381-10 (4)
- NUT 2382-1 (4)
- NUT A. 2382-23
- WASHER 2233-26
- SEMS 5531-3

NOTE: Lead cable is not supplied in the BASE package or in the BASE & SPRING package. SPRING is not supplied in the C-32 BASE package.

**ANTENNA CABLE
NOT SUPPLIED IN
THE BASE**

Kit No. 2944

